




GENERAL DESCRIPTION

- CUSTOM is a Full digital and universal Thyristor unit based on a very powerful dedicated micro configurable via serial communication port for all inputs, firing modes, control modes and loads types.
- Suitable to drive resistive, inductive, transformer with normal resistor
- Two legs switching three wires loads STAR or DELTA connection
- Frontal Key Pad standard to configure all the internal functions and parameters.
- Four Analog output configurable
- Six Digital input
- Four relay output
- Universal Input signal with automatic zero/span calibration.
- Universal Firing modes, customer configurable via Key Pad or communication port as Burst Firing or Delayed Triggering
- Universal Feed back modes
- Unbalanced load and Heater Break Alarm.
- RS 485 port. Modbus protocol
- Comply with EMC and 

TECHNICAL SPECIFICATION

Operating Temperature	0+40°C over this temperature see derating curve
Voltage Power supply	480V standard, 600V or 690V on request
Auxiliary Voltage Supply	90÷265V; 20VA power consumption. Fan voltage supply: 230V ±15% as a standard and 110V on request.
Input 1	Main reference, 4÷20mA, 0÷10V, 10KPOT, RS485 port
Input 2	Secondary reference, 0÷10V, 10KPot
Ouput	Four Analog output 0÷10V, (0÷20mA or 4÷20mA are as an option), Power and current phase 1-2.3 as standard
Digital Input	Six optoisolated digital output (12/24Vdc), for START, STOP, ENABLE, CALIBRATION, RESET ALARM and EXTERNAL ALARM
Relay Output	Three configurable relay output and one critical alarm
Universal Firing	One of these firing modes can be configured Burst Firing BF, Delayed Triggering
Control Mode	Voltage (V), Power (Vxl) and External feedback
Heater Break Alarm	Circuit microprocessor based to diagnose partial or total load failure and short circuit on Thyristors
Unbalanced load	This protection allow to have Multidrive working up to 20% of unbalance on one phase
Communication	RS485 Port. Modbus communication protocol 9600 or 19200 bauds
Thermal protection	Available on forced ventilated units

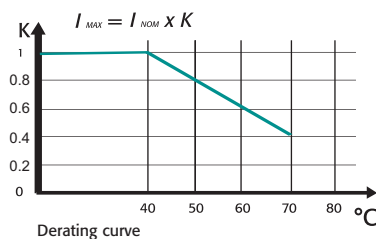


HEATER BREAK ALARM HB

ON FRONT CABINET




The Heater Break circuit diagnostic partial or total load failure. circuit is compensated for voltage fluctuation. On this unit is possible to set the nominal resistance and the alarm sensitivity. HB alarm in addition diagnostic the thyristor in short circuit. A normally open contact gives the alarm condition and an indication of the alarm type appears on display.

BURST FIRING BF



This firing is performed digitally within the thyristor unit at zero volts, producing no EMC interference. Analogue input is necessary for BF and the number of complete cycles must be specified for 50% power demand. This value can be between 1 and 255 complete cycles, determining the speed of firing. When 1 is specified, the firing mode becomes Single Cycle (SC).

DELAYED TRIGGERING DT



Used to switch the primary coil of transformers when coupled with normal resistive loads (not cold resistance) on the secondary, DT prevents the inrush current when zero voltage (ON-OFF) is used to switch the primary. The thyristor unit switches OFF when the load voltage is negative and switches ON only when positive with a pre-set delay for the first half cycle.

CD EASY



This is a memory support tool that can be used by maintenance personnel on shop floor. The user can copy the configuration of one unit and paste it into another. CD EASY is very simple with one push button to upload the configuration (Read) and another to download the stored configuration (Write). This tool can be used with our Remote service to mail the working configuration via internet.

CD-KP




The CD-KP is designed mounted on front cabinet and to be connected with all cd automation's Thyristor units via RS485. On front unit is possible to read parameters, power, current, reference and alarms. One of these variables can be selected and retransmitted via an isolated output (4-20mA or 0-10V). On front unit is available a connector to communicate with PC. In addition are available Local/Remote, up and down and function command.

FIELD BUS MODULE



CD-RS Used to convert RS232 to RS422
TU-RS485-PDP Used to convert RS485 Modbus to Profibus DP
TU-RS485-ETH Used to convert RS485 Modbus to Ethernet
For more informations see "Field Bus Module"

POWER SCALING




It's a scaling factor of the input command signal and limit the output of Thyristor unit. This parameter can be adjusted from 1 to 99% via RS485 or by the front of the unit. If this parameter is set at 50% and the input signal is 100% the output becomes 50%. This feature is very useful to reduce the power when a zone has been oversized or when a temperature controller gives same reference to more unit along a furnace. Imagine 3 zones with left and right one close to the door where in a continuous furnace the material comes into and flows out. The profile of temperature along the furnace is higher in the central zone because there is less dispersion but if we scale its input we can have a flat profile.

APPLICATIONS AND FOCUS ON:

- Infrared lamp.
- Autoclaves.
- Furnaces.
- Chemical
- Petrochemical
- Climatic chambers
- Pharmaceutical

WIRING CONNECTION CUSTOM 2PH from 1000A to 2700A

MULTIDRIVE 2PH

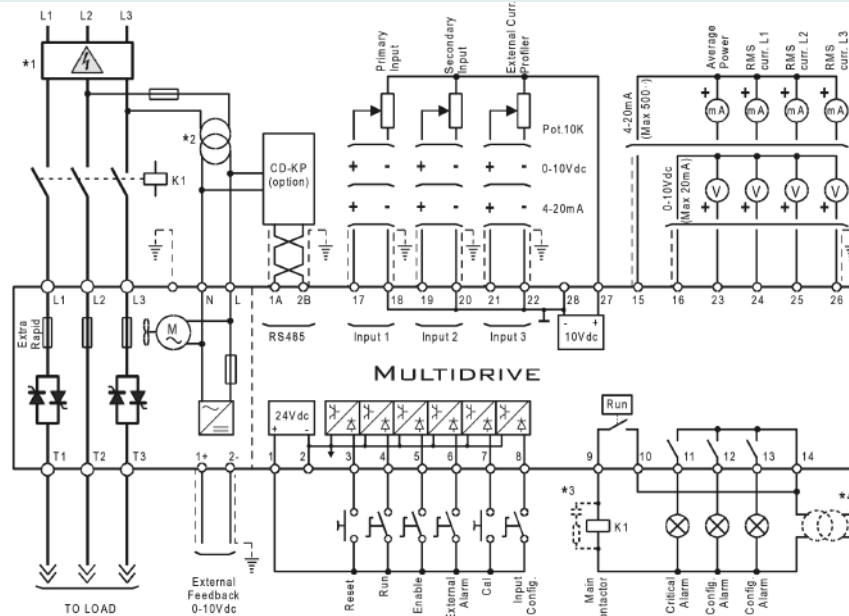

NOTE

- (1) • The user installation must be protected by electromagnetic circuit breaker or by fuse isolator.
- (2) • Use an appropriate external transformer based on the auxiliary voltage supply of the electronic board (see the identification label)
- (3) • The coil contactor, the relays and other inductive loads must be equipped with proper RC filter.
- (4) • Before give the Start command supply the auxiliary voltage

2 PHASE STACK THYRISTOR

CURRENT	MAX VOLTAGE	DRAWING
1000	500	4141
1400	690	4227
1500	500	4112-A
1850	690	4143
2000	500	4143-A
2400	690	4104
2750	500	4104

OUTPUT FEATURES (POWER DEVICE)

Current A	Voltage range (V)	Ripetitive peak reverse voltage (600V) (690V)		Latching current (mAeff)	Max peak one cycle (10msec.)	Leakage current (mAeff)	I ² T value for fusing tp=10msec.	Frequency range (Hz)	Power loss I=I _{nom} (W)	Isolation Voltage Vac
1000A	330÷690V	1600	N.A.	700	12500	300	781000	47÷70	2200	2500
1400A	330÷690V	1600	1800	700	24600	300	3026x1E3	47÷70	3080	1700
1500A	330÷600V	1600	N.A.	700	24600	300	3026x1E3	47÷70	3750	1700
1850A	330÷690V	1600	1800	700	36000	300	6480x1E3	47÷70	4070	2500
2000A	330÷600V	1800	N.A.	700	36000	300	6480x1E3	47÷70	4400	2500
2400A	330÷690V	1800	1800	700	60000	300	180000x1E3	47÷70	5334	2500
2700A	330÷600V	2200	N.A.	700	60000	300	180000x1E3	47÷70	6750	2500

ORDERING CODES CUSTOM 2PH from 1000A to 2700A

Note 1

	1	2	3	4	5	6		7	8	9	10	11	12	13	14	15	16
CUSTOM 2PH	C	2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

4, 5, 6 Current	
Description code	Numeric code
1000A (2)	1 0 0 0
1400A	1 4 0 0
1500A (2)	1 5 0 0
1850A	1 8 5 0
2000A (2)	2 0 0 0
2400A	2 4 0 0
2700A (2)	2 7 0 0

7 Max Voltage	
Description code	Numeric code
480V	4
600V	6
690V	7

8 Aux. Voltage supply	
Description code	Numeric code
110V	1
230V	2

9 Input	
Description code	Numeric code
0:10V	V
4:20mA	A
10KPot	K
RS485	R

10 Firing	
Description code	Numeric code
Burst Firing BF	B
Delayed Triggering + Burst Firing DT+BF	D

11 Control Mode	
Description code	Numeric code
Open Loop	0
Voltage Feed Back V	U
Power Feed Back VxI	W

12 Option (3)	
Description code	Numeric code
4:20mA Retransmission Load Current and Control Mode	A
0:10V Retransmission Load Current and Control Mode	V

13 Fan Voltage	
Description code	Numeric code
Fan Voltage equal to Aux. Voltage	3

14 Approvals	
Description code	Numeric code
CE EMC For European Market	0

15 Manual	
Description code	Numeric code
None	0
Italian Manual	1
English Manual	2
German Manual	3
French Manual	4



16 Load type/Connection	
Description code	Numeric code
Resistive Load/Delta Connection	1
Resistive Load/Star Connection	2
Transformer Load/Delta Connection	3
Transformer Load/Star Connection	4

Note (1): After 16th digit write current and voltage of load inside brackets Ex. (190A-400V). this is to receive the Thyristor unit already tuned from CD Automation

Note (2): Rating not available at 690V

Note (3): In total are available 4 Analog output. One dedicated to control mode and the other 3 for current on phases 1-2-3



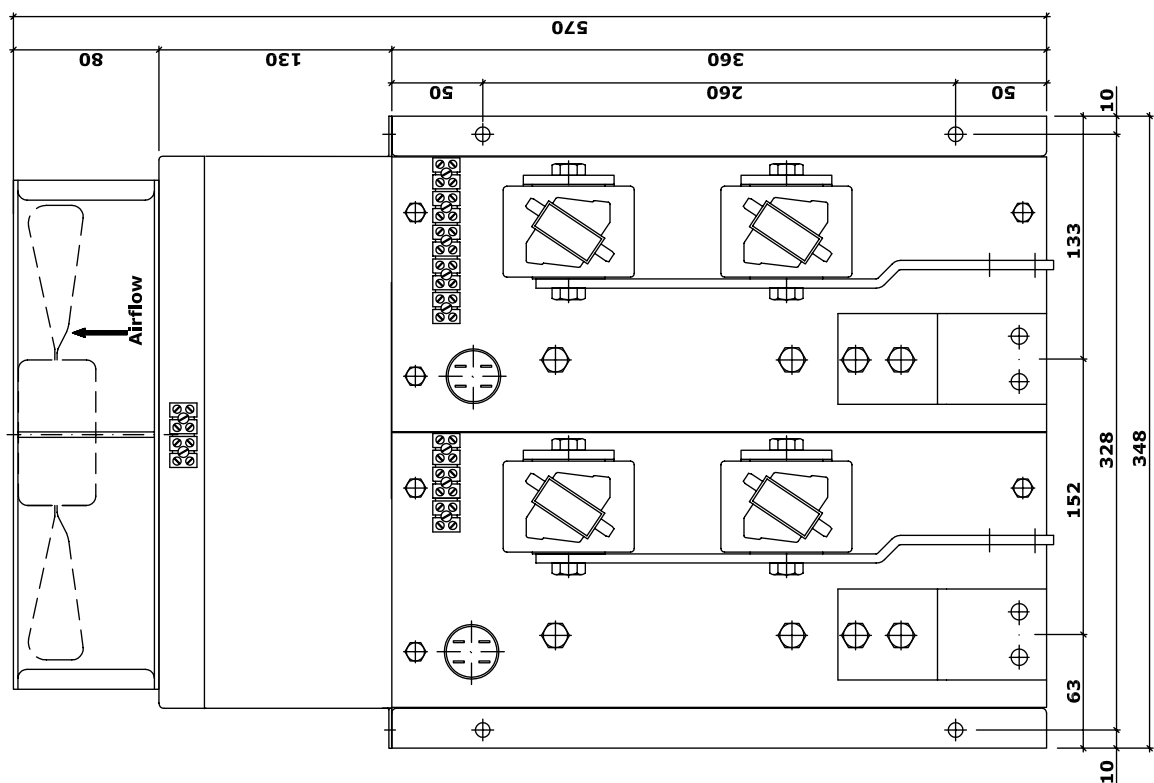

**2 Phase Thyristor unit
1000 A**


Dimensions in mm



Tel. 0331-577479
Fax 0331-579479




Code:
2P-001

Date:
09-11-11

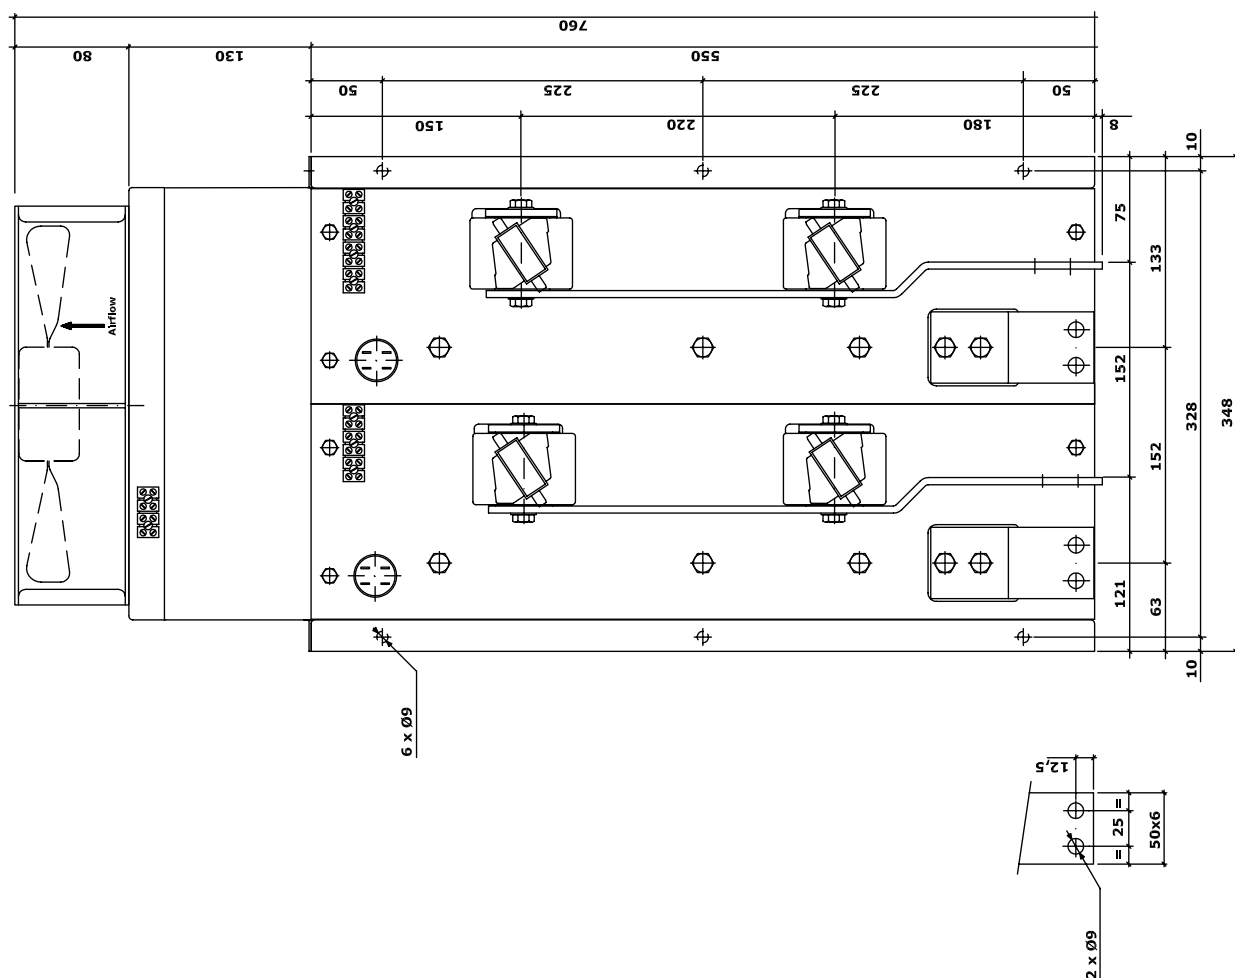




Dimensions in mm

Date: 09-11-11

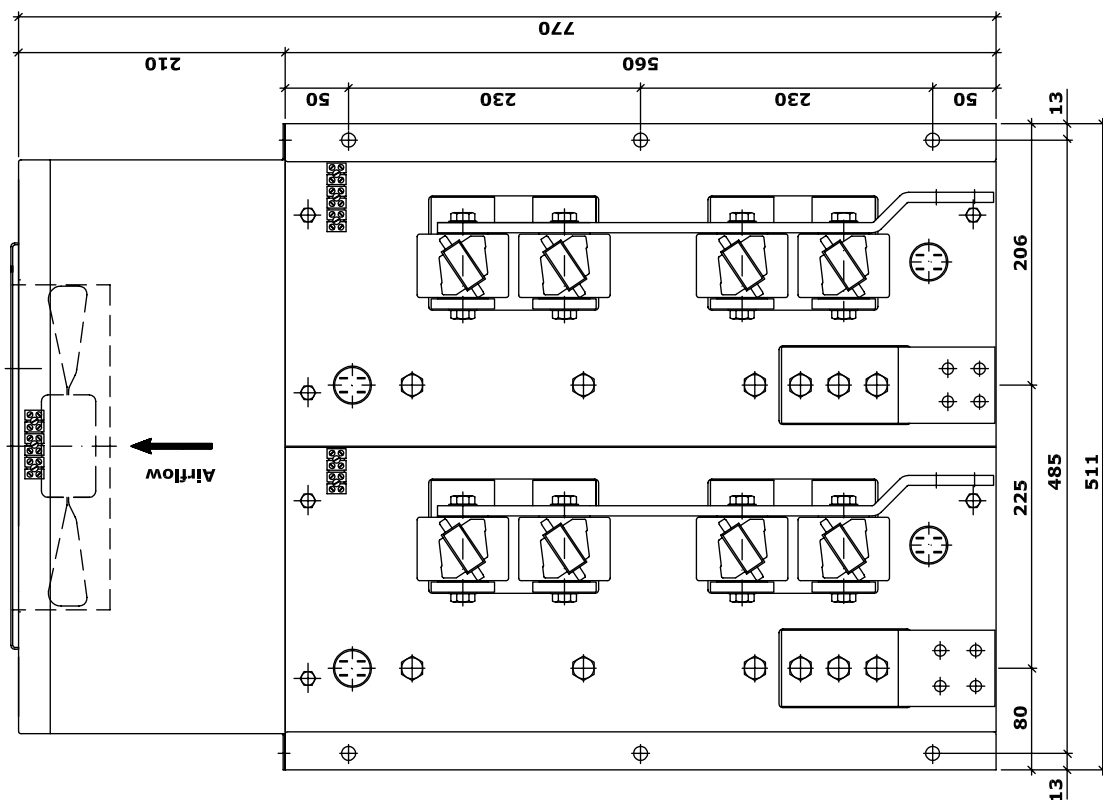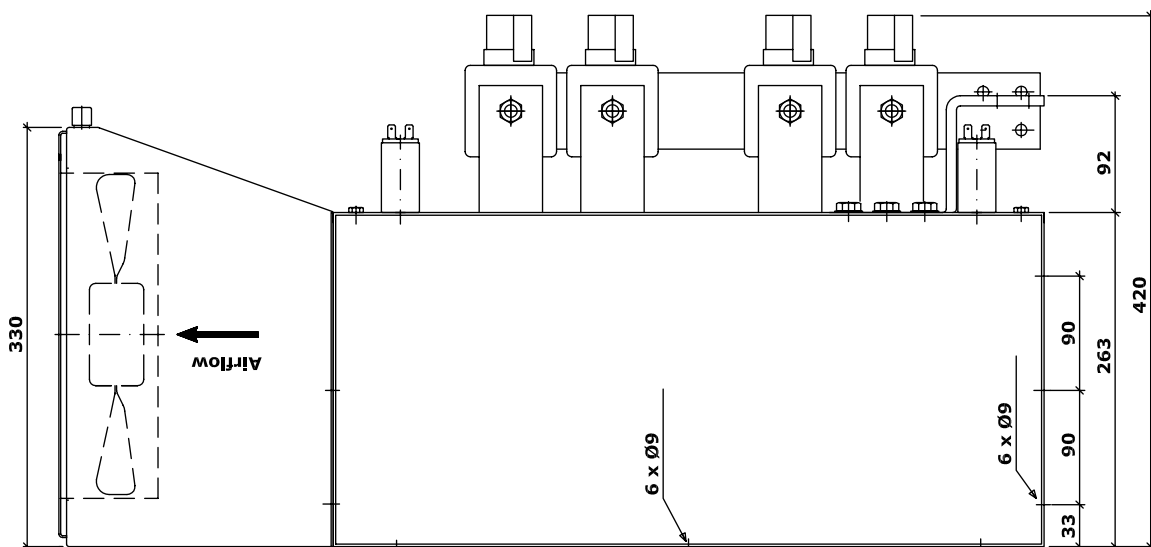

Code: 2P-003	2 Phase Thyristor unit 1850 - 2000 A	Date: 09-11-11
Dimensions in mm		

CPD
Tel. 0331-577479
Fax 0331-579479

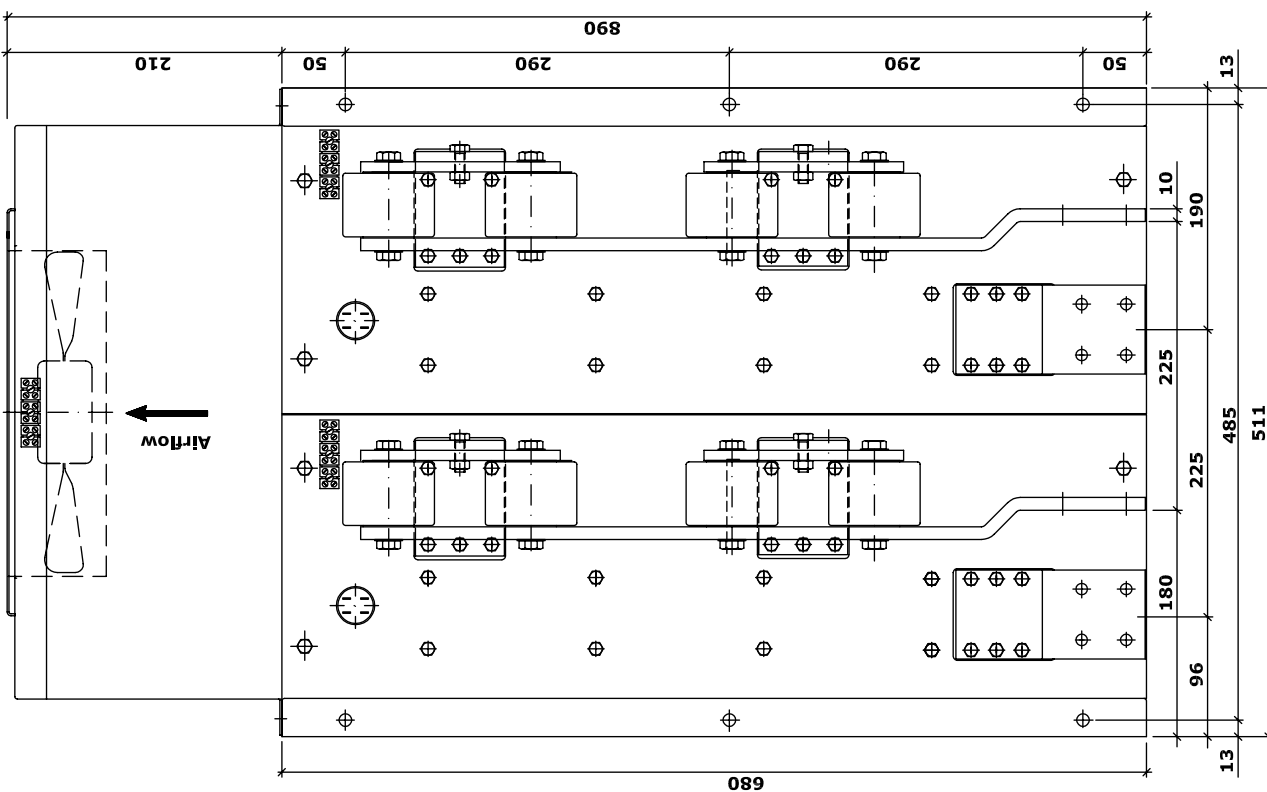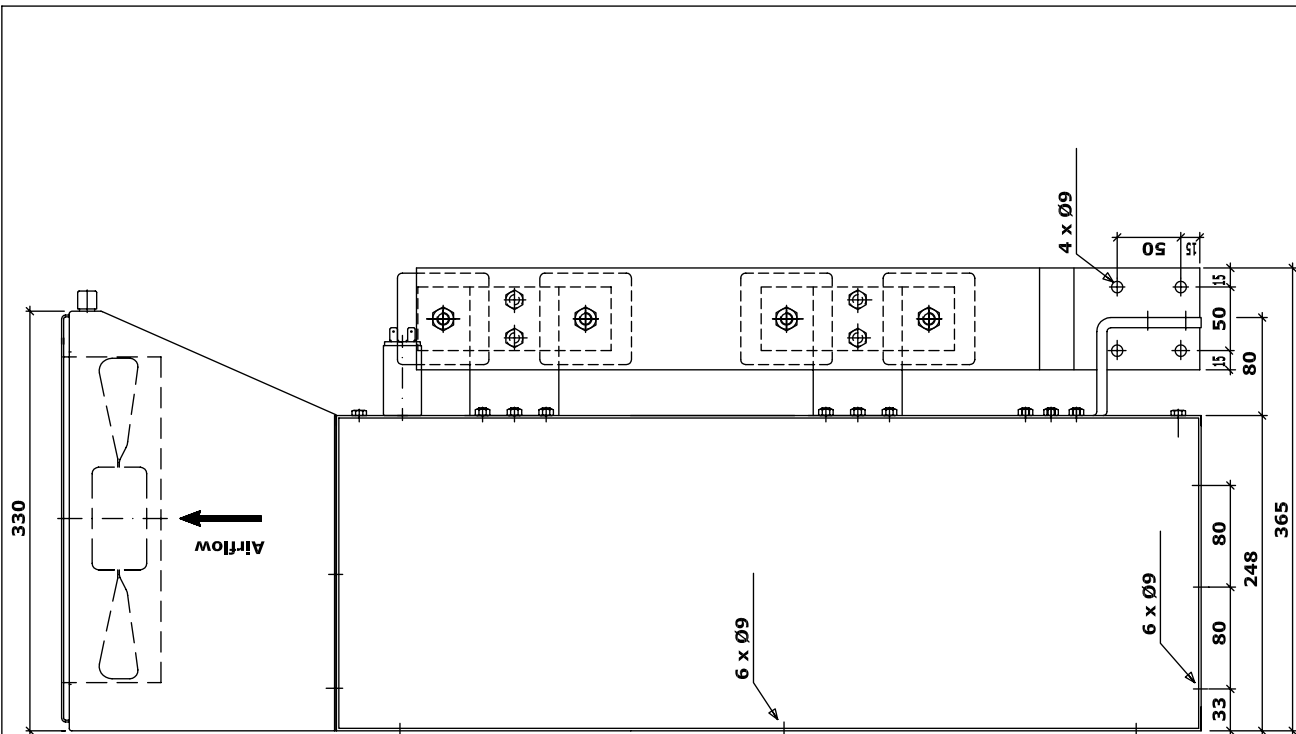

	2 Phase Thyristor unit 2400 - 2750A	Code: 2P-004
Tel. 0331-577479 Fax 0331-579479	Dimensions in mm	Date: 09-11-11